




"THE STANDARD OF EXCELLENCE IN THE INDUSTRY"

## Instructions for the Third Hand Tool

For the Third Hand Tool, the top finger (Tab) is longer than the bottom finger (Hook). (See drawing below.)

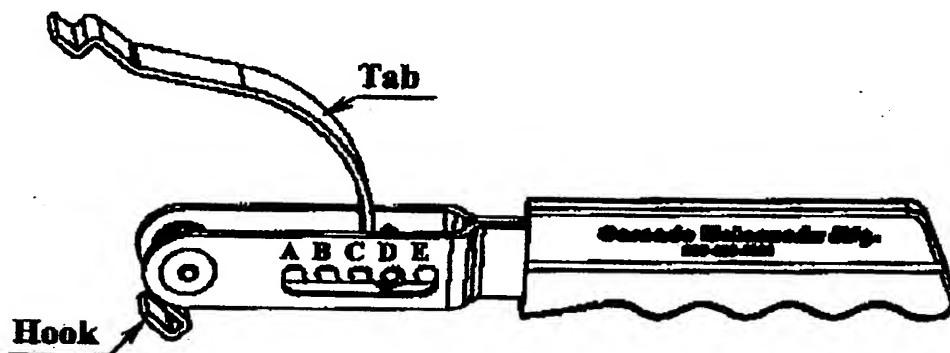


- ◆ Insert the Tab into the Slot in the Repair Clamp's Receiver Bar Slot.
- ◆ Place the Hook on the outside edge of the Stud Bar.
- ◆ Adjust the Tab's pin to be in Slot "C".
- ◆ Pull down the Third Hand Tool. The Third Hand should lock into place.

If the Third Hand is too loose, open & move the Tab's pin back 1 notch toward "E", try again.

If the Third Hand is too tight, open & move the Tab's pin forward 1 notch toward "A", try again.

- ◆ Tighten Nuts on Repair Clamp as instructed.
- ◆ Lift the handle to Unclamp &  
Remove The Third Hand Tool.

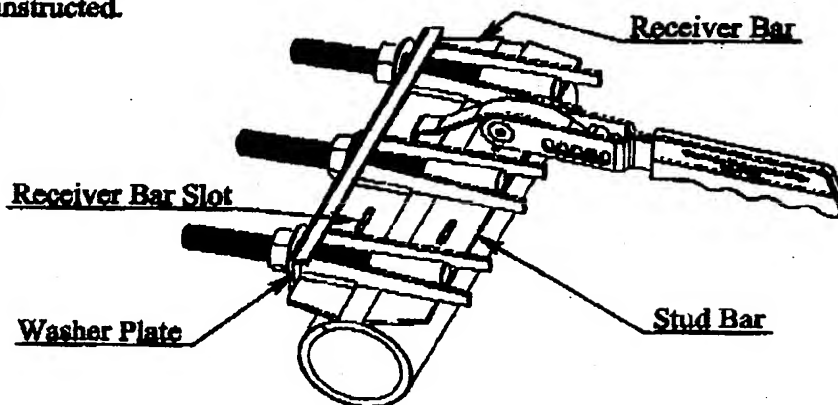

EXHIBIT

E

tabbier